



Katalog proizvoda

PROZORI I VRATA

ZA NOVO VRIJEME

Energy efficiency windows & doors with aluplast-Technology



Contents

1 IDEAL series
// page 04 ff

- IDEAL 4000
- IDEAL 5000
- IDEAL 7000
- IDEAL 8000

4 Product portfolio
// page 08 ff

- energeto®
- IDEAL series
- Residential doors
- Lift-and-slide door
- Sliding windows

3 Decor and colour
// page 14/15

- Decor – World of Colours and Natura
- Aluminium shell aluskin®



IDEAL 4000®

70 mm profile depth

- thermal insulation of the standard combination $U_f = 1.3 \text{ W/m}^2\text{K}$
- backstop gasket system with two sealing levels
- glazing thickness up to 41 mm
- design variety in the sash
(classic-line recessed | soft-line semi-recessed | round-line recessed | round-line semi-recessed)
- tested burglar resistance class RC2
- concealed drainage is possible
- excellent sound insulation up to noise insulation class IV
- 5-chamber system as standard combination
- available in numerous decor variations
- available with aluskin® aluminium shells



IDEAL 5000®

70 mm profile depth

- $U_f \text{ value} = 1.2 \text{ W/m}^2\text{K}$
- centre gasket system with three sealing levels for increased burglar resistance
- glazing thickness up to 41 mm
- design variety in the sash
(classic-line recessed | classic-line semi-recessed | soft-line semi-recessed | round-line semi-recessed)
- tested burglar resistance class RC2
- concealed drainage is possible
- excellent sound insulation up to noise insulation class IV
- available in numerous decor variations
- available with aluskin® aluminium shells



IDEAL 7000® 85 mm profile depth

- U_f value = 1.1 W/m²K
- backstop gasket system with two sealing levels
- glazing thickness up to 51 mm
- classical sash design (classic-line recessed)
- tested burglar resistance class RC2
- concealed drainage is possible
- excellent sound insulation up to noise insulation class IV
- available in numerous decor variations
- available with aluskin® aluminium shell



IDEAL 8000® 85 mm profile depth

- U_f value up to 1.0 W/m²K possible
- centre gasket system with three sealing levels for increased burglar resistance
- glazing thickness in recessed sash up to 51 mm
- glazing thickness in semi-recessed sash up to 59 mm
- design variety in the sash (classic-line recessed | classic-line semi-recessed | round-line recessed | round-line semi-recessed concave)
- tested burglar resistance class RC2
- concealed drainage is possible
- excellent sound insulation up to noise insulation class IV
- available in numerous decor variations
- available with aluskin® aluminium shells



Residential doors



Your calling card to the outside world

For this reason, it should perfectly harmonize with the architectural style and design of the house, and at the same time provide optimal thermal insulation. It is therefore all the more important to choose the right system to meet individual needs.

aluplast offers a wide range of residential door designs that are all compatible with the window systems and that meet individual thermal insulation requirements. From aluminium shells to decor lamination: The visual appearance leaves nothing to be desired.



Main entrance door 70mm

- Thermal insulation (U_f value of $1.5 \text{ W/m}^2\text{K}$)
- perimetral interior gasket and additional exterior gasket for outstanding thermal insulation
- thermally-broken threshold
- weldable corner connectors guarantee highest stability
- optimal safety due to high quality and safety standards
- the use of appropriate security hardware guarantees perfect protection against burglary



Main entrance door 85mm

- Outstanding thermal insulation (U_f value $1.2 \text{ W/m}^2\text{K}$)
- large reinforcement chambers for highest stability that can optionally be foam-filled (with the technology foam inside)
- glass and panel thickness up to 51 mm possible
- fine profile design with a visible sash width of only 116 mm
- optimized sealing concept using newly developed backstop gaskets in the frame and mullion
- innovative hardware groove for locking hardware of 16 mm and 24 mm width for flat false mullions
- the backstop gasket system allows for the installation of solid security striker plates
- Main entrance doors can easily be complemented by window side elements



Highlight
Special sash
design for leaf-
enclosing infill

Lift-and-slide door



Entering a new modular dimension

The modular system is a first in this segment: One single system allows for the manufacture of three different products with different thermal insulation properties, from elements meeting only basic insulation requirements to passive house suitable lift-and-slide doors.


Whichever design you choose, the product visually harmonizes with the other aluplast systems and forms an appealing and harmonious image in your rooms.



4 PRODUCT PORTFOLIO

Lift-and-slide door 85 mm profile depth

- improved insulating properties
- threshold and guide rail according to module in either aluminium or GRP
- glass and panel thicknesses up to 51 mm possible
- integrated sealing for highest product quality
- available in numerous decor variations
- available with aluskin® aluminium shells

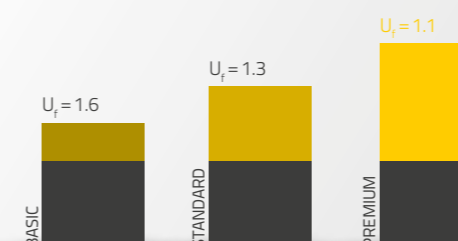

1 system - 3 products
- Basic
- Standard
- Premium



Sliding windows



Stylish views

Enjoy the most beautiful views from your living spaces and let them brighten up your life. The aluplast sliding window series can be designed individually according to your needs and ideas.

Bring your own personal touch into your home and experience the new living comfort.



mono-rail

- Glazing thickness up to 8 mm
- unique sliding window solution with fixed and movable parts
- wide range of accessories available due to standardised 60 mm frame system
- integrated PVC interlock guarantees perfect tightness
- fanlights and different window combinations possible



sliding window 60mm

- glazing thickness up to 20 mm
- fine profile design
- Steel reinforcements inside the profiles ensure high stability even of large elements
- the use of appropriate security hardware guarantees perfect protection against burglary
- available in numerous decor variations

multi-sliding

- glazing thickness up to 32 mm
- extension profiles for multi-track sliding windows available
- excellent structural values allow for large elements
- aluminium threshold with integrated drainage system
- easy installation
- available in numerous decor variations



Colourful world



The aluplast colours:

A selection, as colourful as the world

The world is filled with colours – from red over yellow to violet and black.

It is hard to imagine a life without colours when we see the world of colours in all its enriching beauty. To those who feel inspired to redesign and colour their homes, aluplast offers a wide range of window Decors to choose from.



Decors – World of Colours and Natura

With more than 40 decor variations, the aluplast World of Colours allows you to individually design the façade. Naturally, all decor foils feature the new cool-colors technology that set new standards: This technology guarantees considerably improved performance characteristics as well as a longer life span of the surfaces. Cool-colors perfectly combine function and design: Their special patented pigments measurably reduce the surface temperature of laminated window profiles. Whether you prefer plain colours, wood texture design or lacquered surfaces – the energeto® colour range offers something for every taste.



aluskin® aluminium shells

The elegant appearance of aluminium is very en vogue these days. aluplast believes in the intelligent mix of plastic and aluminium. Covering uPVC windows with exterior aluminium shells simply clipped onto the plastic profile combines a whole bunch of benefits a pure aluminium window cannot come up with.

The result is a high-end product combining an appealing design, individuality and the highest level of security. Aluminium shells can be butt-jointed or mitre-jointed in the frame corners.



Firma Aluminium System Plus s.r.o., od roku 1994 ponúka ucelený výrobný program hliníkových a plastových okien, dverí, fasád, strešných kontrukcií, zimných záhrad, protipožiarnych výplní, zábradlí a prísľusenstiev. Atesty a certifikáty plastového a hliníkového programu spĺňajú požiadavky európskeho štandardu.

Náš profesionálny tím zabezpečuje kontinuálny servis a poradenstvo od úvodných fáz projektu, až po dodávku okien a dverí a ostatných kontrukcií k zákazníkovi.

Osobný vzťah k zákazníkovi je pre nás dôležitý rovnako ako vývoj a výroba nových produktov.



KUPRO d.o.o.

Novo naselje bb
71380 Ilijaš
Bosna i Hercegovina
Tel: +387 33 84 89 05
Mob: +387 61 22 26 52
Mob: +387 62 30 30 99
Mob: +387 61 13 03 73
e-mail: info@kupro.ba

www.kupro.ba

aluplast GmbH | Kunststoff-Fenstersysteme | www.aluplast.net